



## ESD - CONTROL TILE 導電地板

2023 New Collection  
COMMERCIAL SPACE

本公司產品均已投保泰安產物產品責任險最高賠償金額1000萬元整

20230316


2023 New  
Collection

導電地板

ESD - CONTROL TILE



## ESD - CONTROL TILE 導電地板

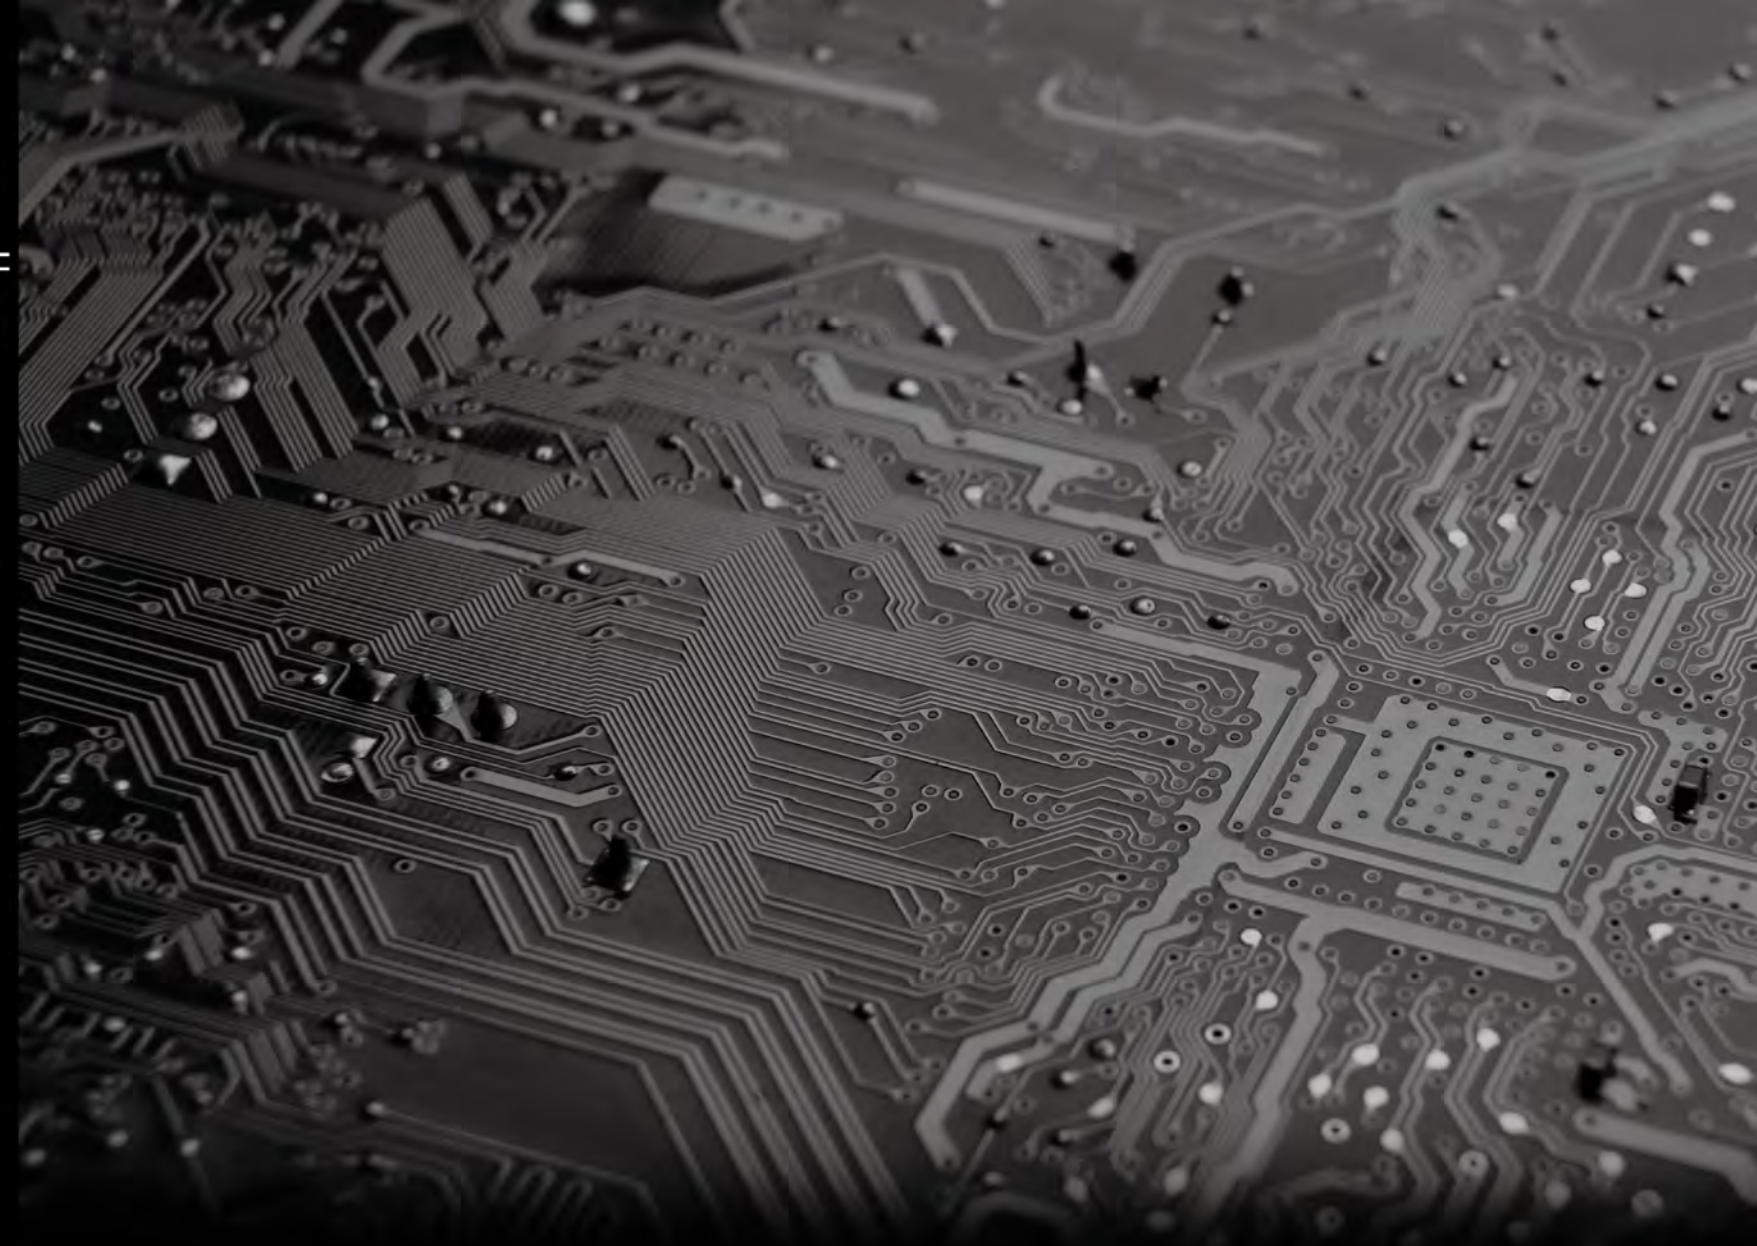






# 導電地板

## ESD-CONTROL TILE

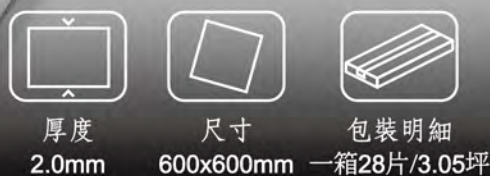

Widely used in the electronics industry, technology industry, laboratories, operating rooms, and places with precision instruments and equipment.

廣泛應用於電子產業、科技產業、實驗室、手術室、具有精密儀器及設備的場所使用。

ESD-CONTROL floor is non-porous and easy to clean surface dirt.

地板具有不滲透性,易於清潔表面污垢。

It is composed of materials such as polyvinyl chloride resin, plasticizer, stabilizer, and conductive materials. The conductive property is achieved through the conductive network formed between plastic particles at the interface, providing permanent anti-static function.

由聚氯乙稀樹脂、增塑劑、穩定劑、及導電材料等物質組成,利用塑料粒子介面間形成的導靜電網路導電,具有永久性防靜電功能。



ESD-01



ESD-02

### Conductive Glue - 導電膠



耀盾  
680



UZIN  
KE 2330 L

Copper Foil - 銅箔  
0.025-0.03mm x 1.5cm x 300M=1KG

Welding Rod - 焊條  
Ø4mm x 100M / 卷

Description	Norm	Result
Residual Indentation - Method B 殘留凹陷試驗-B方法	CNS 8907:2016	<0.25
Dimension Stability 加熱長度及寬度變化試驗	CNS 8907:2016	±2.00%
Slip Resistance 防滑性試驗#清掃及乾燥狀態	CNS 8907:2016	Pass
Asbestos Content 石棉含量試驗	CNS 8907:2016	Not-detected
Formaldehyde 甲醛	ISO 17226-1:2021	Not-detected
Optical Density of Smoke 煙霧濃度	ASTM E662	< 450
Flammability 防火耐性	ISO 17226-1:2021	>1.08W/cm²
Electrical Resistance 電阻抗	ASTM F150-2006	2.5X10⁴~10⁶Ω